




## Industrial Heavy-Duty Aluminum Extension/Straight Ladders

CSA grade 1A, ANSI type 1A – 300-lb. Load Rating

- Heavy-duty "C" channel construction
- Side rails: 2 1/2" x 1" for straights up to 14'
- Side rails: 3" x 1" for straights up to 16' and up
- Heavy-duty serrated "D" rungs prevent slipping for safe and sure climbing
- Black ABS, high impact, non-marking end caps
- Heavy-duty safety shoes

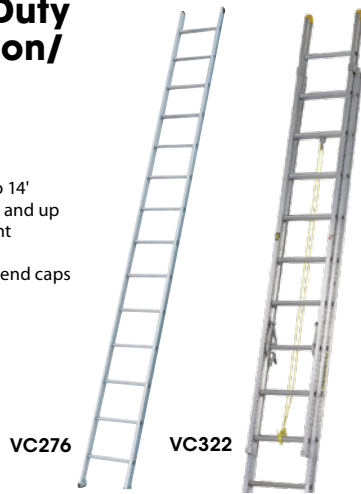

**FEATHERLITE**  
INDUSTRIAL LADDERS

Model No.	Nominal Length'	Working Length"	Outside Width"	Wt. lbs.	Price /Each
<b>STRAIGHT LADDERS (3100D SERIES)</b>					
VC273	8	-	17 3/4	12	
VC274	10	-	17 3/4	14	
VC275	12	-	17 3/4	18	
VC276	14	-	17 3/4	21	
VC277	16	-	17 3/4	24	
VC278	18	-	17 3/4	27	
VC279	20	-	17 3/4	30	

Model No.	Nominal Length'	Working Length"	Outside Width"	Wt. lbs.	Price /Each
<b>EXTENSION LADDERS (3200D SERIES)</b>					
VC322	16	13	17 3/4	31	
VC323	20	17	17 3/4	36	
VC324	24	21	17 3/4	43	
VC325	28	25	17 3/4	51	
VC326	32	29	17 3/4	58	
VC327	36	32	17 3/4	69	
VC328	40	35	17 3/4	77	

## Industrial Heavy-Duty Aluminum Extension/Straight Ladders

CSA grade 1A, ANSI type 1A - 300-lb. Load Rating

- Rigid box section side rails, unequalled for strength and durability
- Side-mounted rope pulley and slide guide system keeps rope clear of climbers feet and allows easy raising (only on 4200D Series)
- Yellow ABS, high impact non-marring end caps
- Premium heavy-duty rung locks (Only 4200D Series)
- Slip-resistant serrated "D" rungs for safe climbing and comfort (round rung on 4100 Series)
- Heavy-duty ribbed swivel feet with ice pick



**FEATHERLITE**  
INDUSTRIAL LADDERS

Model No.	Nominal Length'	Working Length'	Outside Width"	Wt. lbs.	Price /Each
<b>STRAIGHT LADDERS (4100 SERIES)</b>					
MD506	8	-	14 5/8	13	
MD507	10	-	14 5/8	16	
MD508	12	-	14 5/8	19	
MD509	14	-	14 5/8	22	
MD510	16	-	14 5/8	25	
MD511	18	-	14 5/8	28	
MD512	20	-	14 5/8	31	
MD513	22	-	15 3/4	41	
MD514	24	-	15 3/4	44	

Model No.	Nominal Length'	Working Length"	Outside Width"	Wt. lbs.	Price /Each
<b>EXTENSION LADDERS (4200D SERIES)</b>					
VC033	16	13	17	29	
VC034	20	17	17	37	
VC035	24	21	17	44	
VC036	28	25	17	50	
VC037	32	29	18 1/2	69	
VC038	36	32	18 1/2	78	
VC039	40	35	18 1/2	86	
VC040	44	39	18 1/2	94	


### The following three causes are responsible for over 94% of all ladder accidents:

- A person overreaches and the ladder tips sideways
- A person does not transfer their weight properly when moving from a roof to the ladder, resulting in the ladder falling
- The base of the ladder slips outward while someone is standing on the ladder

## Industrial Extra Heavy Duty Multi-Purpose Jaws™ Telescopic Ladders

CSA grade 1AA, ANSI type 1AA-375-lb. Load Rating

- Compact and multifunctional, replaces all conventional ladders
- Easily folds for storage or transport
- Flared ends with slip-resistant feet provide superior stability in any position
- Polymer rung locks are virtually indestructible
- Welded outer rungs
- Extra deep side rails make the Jaws™ stiffer and stronger
- Mechanical interlocking tooth hinges for superior strength and 5 locking positions
- Extruded 6061-T6 marine alloy for strength and corrosion resistance
- JLT Series has extra-strong "Box-beam" rails for maximum strength and durability

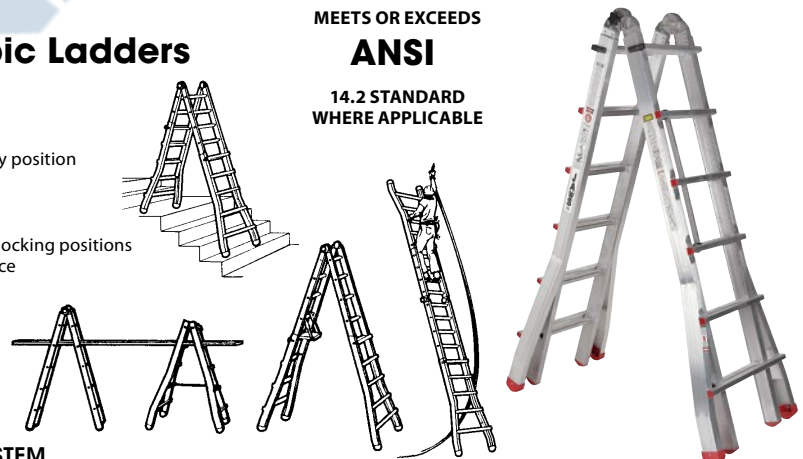

MEETS OR EXCEEDS  
**ANSI**  
14.2 STANDARD  
WHERE APPLICABLE

**FEATHERLITE**  
INDUSTRIAL LADDERS

### HIGH PERFORMANCE TELESCOPING CLIMBING SYSTEM

Model No.	Folded Height	Extension Range'	Stepladder Range'	Scaffold Height'	Wt. lbs.	Price /Each
MA740	4.75'	9 to 15	4.5 to 7.5	1 to 4	36	
MA741	5.75'	11 to 19	5.5 to 9.5	1 to 5	41	
MA742	6.75'	13 to 23	6.5 to 11.5	1 to 6	50	