



Landscaping Level Rakes

- All-welded curved steel tines
- Tempered carbon steel blade
- Ergonomic fibreglass handle
- Flat back for smoothing loose soil
- No. of tines: 16
- Blade size: 16" x 6"
- Overall length: 53"

Model No. NJ108

Price/Each \$

aurora tools



Heavy-Duty Bow Rakes

- All-welded curved steel tines
- Tempered carbon steel head
- Ergonomic grip
- Blade Dimension: 15" x 6"
- Number of Tines: 15
- Handle Type: Straight
- Handle Material: Fibreglass
- Overall Length: 64"

Model No. TLZ471

Price/Each \$

aurora tools



Pro™ Level Rakes

- Industrial-grade landscaping level rake 36 tines
- Anodized aluminum handle
- Extra-large aluminum head and braces
- Limited lifetime warranty
- Delivered unassembled
- Blade Size: 36"
- Blade Material: Aluminium
- Handle Length: 66"
- Handle Material: Aluminium
- Handle Type: Straight
- Weight: 5.5 lbs.

Model No. TFX663

Price/Each \$




Rakes & Forks

PRO™ SERIES

Top-of-the-line series. Professional industrial quality tools intended specifically for continuous and intensive use.

GARANT™ SERIES

Industrial quality. Practical tools for light to medium duty work.

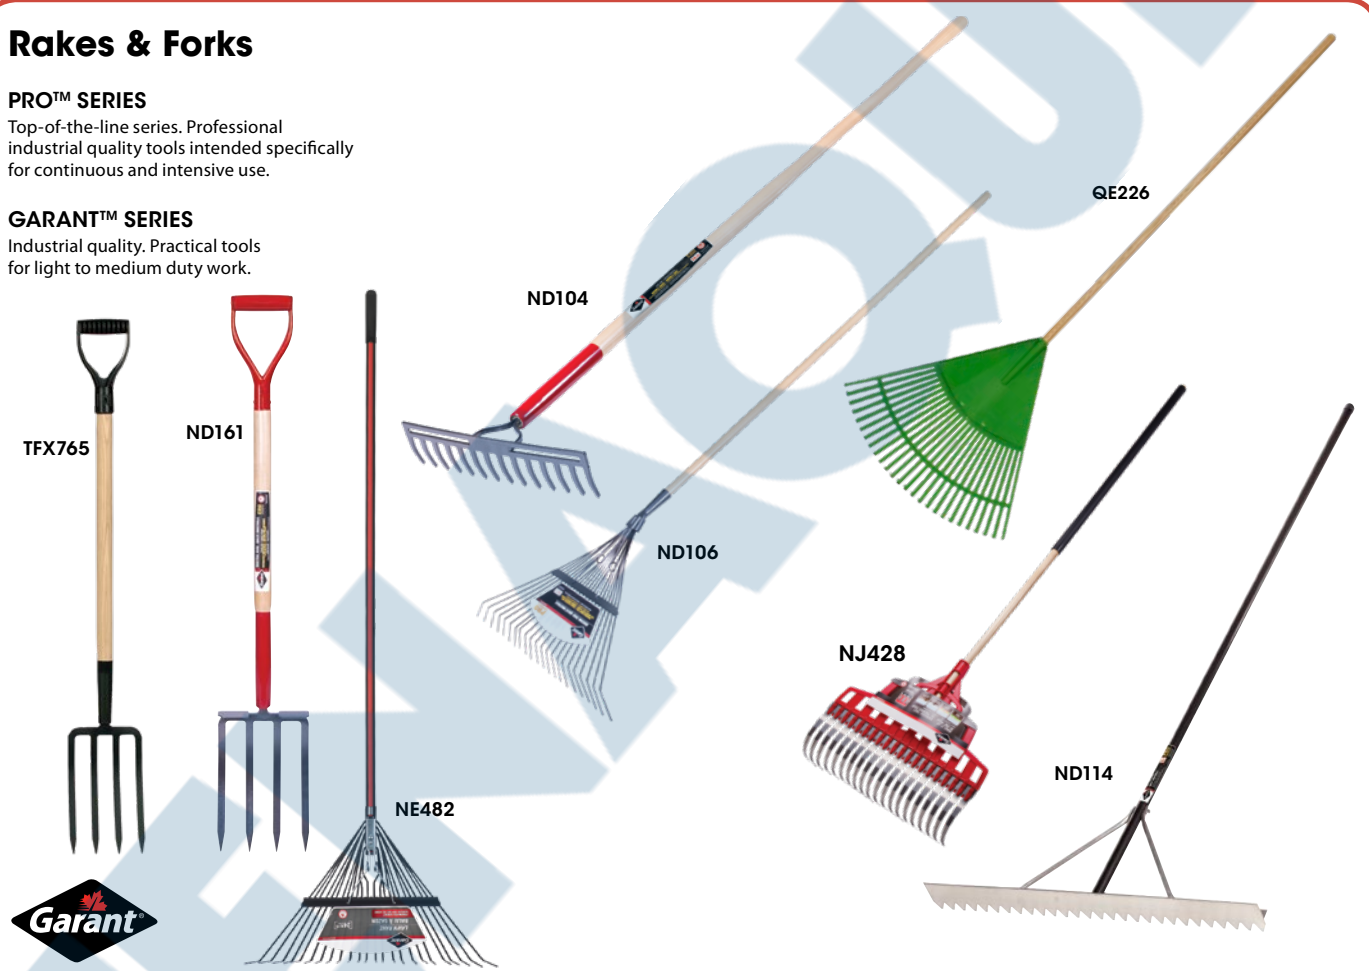

Model No.	Series	Description	Grip / Handle	Repl. Handle	Handle Length"	Head Width"	Price /Each
ND104	Pro™	Double Back Level Rake, Heavy-Duty, Gold Baked Enamel Head Finish	Straight/White Ash	ND097	60	13 3/4	
ND114	Pro™	Asphalt Rake, Aluminum Head and Braces	Straight/Anodized Aluminum	ND124	82	36	
QE226	Practica™	Fan Rake	Straight/Hardwood	-	48	24	
NJ428	Garant™	Multi-Purpose Lawn Rake	Ergonomic Straight/Hardwood	-	48	20	
NE482	Garant™	Lawn Rake, Back Spring Provides Additional Rigidity, 24 Flexible Steel Tines	Straight/Fibreglass	-	54	24	
ND106	Pro™	Industrial Grade Springback Lawn Rake, Tempered Steel Teeth, Reinforced Socket with Welded Plate	Straight/Hardwood	ND099	54	24	
SPADING FORKS							
ND161	Pro™	One Piece Sturdy Forged and Tempered Steel Head, Gold Baked Finish, Four 11" Tines	D-Grip Steel/ White Ash	ND168	32 3/4	7 1/2	
TFX765	Garant™	Spading Fork	D-Grip/Hardwood	-	30 1/2	6	