



10" Dual Sliding Compound Mitre Saws w/Laser



- Sliding rail mechanism incorporating three linear ball bearings provides increased rigidity to produce precise cuts right out of the box
- Sliding fence (left side) can be adjusted outwards when bevel cutting or inwards for increased support of small or delicate materials
- Battery operated, factory calibrated Class 2 laser
- Bevel capacity of 45° left or right
- Mitre capacity of 47° left or 60° right with positive stops at 0°, 15°, 22.5°, 31.6° and 45°
- 2-stage safety switch for increased operator safety
- Includes: 10" mitre saw blade 40CT, box wrench, dust bag, vertical vise, triangle rule, 2 ea. holder

Model No. TLV225

Mfg. No. LS1018L

Price/Each \$

SPECIFICATIONS

Amperage:	13.0
No Load RPM:	4300
Arbor:	5/8"
Mitre Range:	47° Left to 60° Right
Bevel Range:	45° Left to 45° Right
Soft Start:	Yes
Tool Weight:	43.7 lbs.



Heavy Duty 12" Double Bevel Compound Mitre Saws



- Precise mitre system and machined base fence support deliver increased cutting accuracy
- Tall sliding fences support crown mouldings up to 6 5/8" nested and base mouldings up to 6 1/2" vertically
- Adjustable stainless steel mitre detent plate
- Innovative gearbox and belt-drive design
- Includes: Carbide blade, dust bag, blade wrench


Model No. TGZ310

Mfg. No. DW716

Price/Each \$

SPECIFICATIONS

Positive Mitre	
Detents:	11 Positive Stops
Mitre Range:	0°-50° Left, 0°-50° Right
Bevel Range:	0°-48° Left, 0°-48° Right
Vertical Capacity:	6 1/2"
	(baseboard against fence)
Horizontal Capacity:	8"
	(10" with back fence, baseboard lying flat)
No Load RPM:	3600
Arbor:	5/8" or 1"
Motor:	120 VAC, 15 A
Tool Weight:	44 lbs.

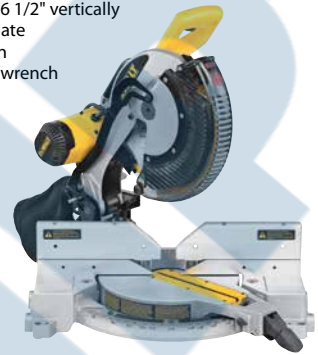

12" Dual Sliding Compound Mitre Saws



- Dual sliding rail mechanism incorporating six linear ball bearings provides increased rigidity to produce precise, adjustment free cuts right out of the box
- 3-stage gear reduction system greatly increases capacity
- Electronic speed control maintains constant speed under heavy load
- Bevel capacity of 45° left or right with positive stops at 0°, 22.5°, 33.9° and 45°
- Mitre capacity of 52° left or 60° right with positive stops at 0°, 15°, 22.5°, 31.6° and 45°
- Re-located mitre scale enables easier viewing during operation
- Includes: 12" mitre saw blade 70CT, box wrench, dust bag, 2 ea. switch safety buttons, vertical vise, triangle rule, 2 ea. holder

Model No. TLV171

Mfg. No. LS1216

Price/Each \$

SPECIFICATIONS

Amperage:	15.0
No Load RPM:	3200
Arbor:	1"
Mitre Range:	52° Left to 60° Right
Bevel Range:	45° Left to 45° Right
Soft Start:	Yes
Tool Weight:	58.6 lbs.



10" Dual Sliding Compound Mitre Saws



- Mitre cuts 0-47° left and 0-52° right with positive stops at 15°, 22.5°, 31.6°, 45° left and right and 0°
- Electronic speed control for constant speed regardless of load
- Two pole linear ball bearing mounted sliding cutting head, adjustable pivot fence for supporting larger stock
- Includes: (1x) 10" (64 tooth) Carbide tipped saw blade, vertical vise, socket wrench #13, dust bag, triangular rule

Model No. TD896

Mfg. No. LS1016

Price/Each \$

SPECIFICATIONS

Amperage:	13.0
No Load RPM:	3700
Arbor:	5/8"
Mitre Range:	0°-47° Left to 0°-52° Right
Blade Size:	10" Dia.
Tool Weight:	46.5 lbs.



12" Compound Mitre Saws

- Positive stops at nine settings; 15°, 22.5°, 31.6°, 45°, left and right and 0° mitre cuts
- Horizontal D-handle design
- Includes: Carbide blade, socket wrench, dust bag, triangular rule, two holders and vertical vise



Model No. TDU772

Mfg. No. LS1221

Price/Each \$

SPECIFICATIONS

Amperage:	15.0
No Load RPM:	4000
Arbor:	1"
Mitre Range:	48° Left to 48° Right
Bevel Range:	45° Left to 0° Right
Tool Weight:	36.4 lbs.



10" Compound Mitre Saws

- Positive stops at nine settings; 15°, 22.5°, 31.6°, 45°, left and right and 0° mitre cuts
- Precision machined aluminum base
- Shaft lock for easy blade changes
- Includes: Cross-cut blade, dust bag, triangular rule and socket wrench

Model No. VK963

Mfg. No. LS1040

Price/Each \$

SPECIFICATIONS

Positive mitre detents:	0°, 15°, 22.5°, 31.6° and 45° left and right
Mitre range:	45° left, 52° right
Bevel range:	45° left, 45° right
Vertical cap.:	2 3/4"
Horizontal cap.:	5 1/8"
No load speed:	4600 RPM
Arbor Size:	5/8"
Motor:	120 V AC, 15.0 A
Weight:	24.2 lbs.
Blade Diameter:	10"

