



Aluminum Hand Bender Head with Handle


- Superior, patented Site-Rite sighting system featuring cast-in, readable markings on the bender heads and a finish that provides for the best visibility in low-light
- Strong, stable square hook design
- Enlarged foot pedal and increased toe room to ensure greater control, stability and leverage
- Bender handle area diameter offers a bigger grip area while still straight up and down for fast 30 degree bends
- Construction: Aluminum
- Marking: 10°, 22.5°, 30°, 45°, 60°
- Petal Type: Foot
- Sub Brand: SITE-RITE



Model No.	Mfg. No.	Capacity	Centerline Bend Radius	Conduit Type	Price /Each
TP047	52034122	1/2"	4-3/16"	EMT	
TP049	52034123	3/4"	5-1/8"	EMT, IMC, Rigid	
NIH747	52034124	1"	6-1/2"	EMT, IMC, Rigid	

Fishstix Kit

- Highly-visible green rods can be easily threaded together and seen when working above ceilings, down walls, or under raised floors
- Two different threaded tips accommodate various bundles of wire or cable
- Length: 12'
- Material: Plastic
- Thickness: 1/4"
- Includes: Bullet and "J" Hook Nose tips
- Colour: Green
- Minimum Bend Radius: 6-1/2"
- Tensile Strength: 200 lbs
- No. Sections: 3
- Section Length: 4'
- Sub Brand: Fish Stix

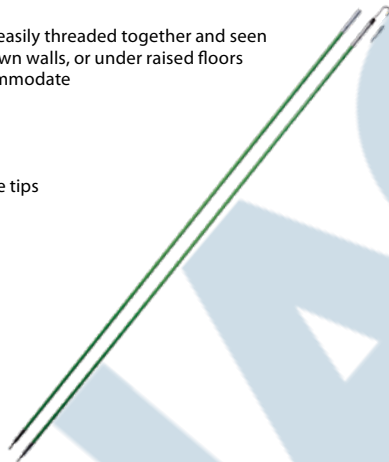

Model No.	Mfg. No.	Price /Each
NI6790	50347578	

Electric Classic Bender with Single EMT Shoes

- Features simple relay controls for easy field repairs
- Compact handle design prevents interference with conduit bending
- Bend 1/2" to 2" conduit in one shoe
- Centerline Bend Radius:
 - 1/2": 4-5/16"
 - 3/4": 5-1/2"
 - 1": 7"
 - 1-1/4": 8-13/16"
 - 1-1/2": 8-3/8"
 - 2": 9-1/4"
- Conduit Type: EMT Conduit



Model No.	Mfg. No.	Price /Each
NI6994	52066226	

Fish Tape

- Dirt-free tape finish keeps hands cleaner during use
- Superior rapid tape pay-out and rewind
- Improved low-profile tip for easy fishing through all sizes of conduit
- Viewing port gives visibility to remaining tape and ability to remove jobsite debris quickly
- Flared case with grip ridges for no-slip handling
- Length: 50'
- Material: Steel
- Thickness: 1/8"
- Tensile Strength: 400 lbs
- Sub Brand: MagnumPRO



Model No.	Mfg. No.	Length'	Price /Each
NI6215	50075004	50	
TP017	52041741	125	
NI1634	52041744	240	

Reel Jackstand

- Wide, welded steel base adds stability with 5/8" holes
- Roller bearings fit in the spindle groove to keep the spindle in place and turning freely
- Capacity: 2500 lbs
- Type: Screw Type



Model No.	Mfg. No.	Price /Each
MD174	50153722	

Puller Package

- Pull up to 6500 lbs. with less than 27 lbs. of operator effort
- Unique floor mounting attachment for quick, reliable set-up
- Leaf-type mounting chains won't twist when tightening
- Heat-treated steel serrated gripper feet for secure mounting to conduit
- Force gauge included to constantly monitor the pull
- Right-angle sheave allows the operator to stand out of the direct line of force
- Audio alarm high-force warning and circuit breaker shut off at maximum force for added safety
- Tapered capstan and patented rope guidance system for better control of the rope when feeding onto the capstan
- Includes: Super Tugger, Floor Mount, Mobile Carriage, Boom Mount, 4 ft Boom Tube, Nose Unit, and 2-1/2", 3", 3-1/2", 4" Slip-In and Screw-On Couplings, and Storage Trays
- Drive Motor: 1-1/2 hp, 120 VAC, 16 Hz, 20 Amp
- Pulling Rope: 3/4" Double-Braided Composite
- Pulling Speed: 16.5 FT/PM at No Load, 11 FT/PM at 2000 lbs, 7.5 FT/PM at 4000 lbs, 6 FT/PM at 6000 lbs
- Sub Brand: Super Tugger



Model No.	Mfg. No.	Price /Each
NIH105	52026624	