



Stella Exit Signs

- C860 approved
- Standard 120/347VAC input (hardwire) and sealed nickel-cadmium batteries provide a minimum of 30 minutes of emergency duration
- Uses 2 W LED board
- Long life LED light source
- Knockout chevrons
- 20-gauge steel construction with baked powder coat white paint finish
- Pre-stamped universal mounting and keyhole slots on backplate

XB930




XB933



Model No.	Mfg. No.	Description	Dimensions W" x D" x H"	Price /Each
XB930	SLE-SP-L-R-U-M	Exit	12 x 2.25 x 7.5	
XB933	SLS-L-R-U-M-UDC	Sortie	18.5 x 2.25 x 7.5	

Stella Running Man Exit Signs

- Feature 120/347 VAC dual input (hardwire), universal DC; 6-24 VDC or self-powered
- Running Man sign uses a 2 watt LED source
- Long life LED light source
- Universal pictograms included showing left indicators, right indicators and no indicators
- 20-gauge steel construction with white baked powder coat paint finish
- Pre-stamped universal mounting and keyhole slots on backplate



XE661

Model No. XE661
Mfg. No. SL-RM-L-U-OLR-M (AC)
Price/Each \$


Model No. XE662
Mfg. No. SL-RM-SP-L-U-OLR-M (Self-powered)
Price/Each \$

Model No. XE663
Mfg. No. SL-RM-L-U-OLR-M-UDC (6-24 VDC)
Price/Each \$



Tempesta™ LED Emergency Luminaires

- Uses two LED modules that are wired in parallel
- Will only illuminate during a power failure
- LEDs are rated for 100,000 hours at L70
- Input Voltage: 120 - 347 V
- Wattage: 17 W
- High quality corrosion, flame and vandal resistant polycarbonate housing
- Comes standard with a Ni-MH battery pack that provides a minimum of 30 minutes of emergency lighting
- IP65 Rating

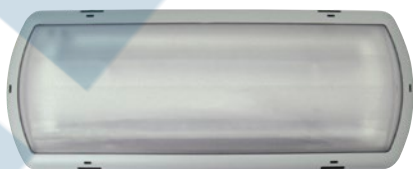

Model No.	Mfg. No.	Description	Dimensions L" x W" x H"	Price /Each
XE874	TA-LED-EM-120-347V-S	Surface Mounted	17 x 6 1/2 x 3 1/2	
XE875	TA-LED-EM-120-347V-R	Recessed	19 1/4 x 9 1/2 x 3 1/2	
XE876	TA-LED-EM-120-347V-TB	T-Bar Mount	23 3/4 x 7 1/2 x 4	

Stella Combination Signs

- C860 approved
- LED EXIT and SORTIE models 120/277/347 VAC dual input (hard wire)
- Push button test switch
- Self-powered for minimum 30 minutes -6 VDC 36 W
- Solid state transfer charger
- Dual diagnostic LEDs indicate AC-ON and CHARGE
- Brownout and low voltage protection
- Two top mounted high impact thermoplastic PAR18 9 W tungsten heads
- Knockout chevrons
- 20-gauge steel construction with baked powder coat white paint finish



Model No.	Mfg. No.	Description	Price /Each
XB929	SLE-6-36-L-R-U-M-2SR/9W	Exit	
XB932	SLS-6-36-L-R-U-M-2SR/9W	Sortie	

REPLACEMENT BULB

XB338	LP104	9 W Tungsten
-------	-------	--------------

Stella Running Man Combo Exit Signs

- Running Man models are supplied with 120/347 VAC dual input (hardwire)
- Push button test switch
- Self-powered for minimum 30 minutes - 6V DC 36W
- Solid state transfer charger
- Dual diagnostic LEDs indicate AC-ON and CHARGE
- Brownout and low voltage protection
- Two top mounted high impact thermoplastic PAR18 9-watt tungsten heads
- Universal pictograms included showing left indicators, right indicators and no indicators
- 20-gauge steel construction with white baked powder coat paint finish
- Certified for sale in Canada by an accredited certification body



Model No. XE664
Mfg. No. SL-RM-6-36-L-U-OLR-M-2SR/9W
Price/Each \$



Illumina® BS100 Series IP66 Vapor-Tight

- Lightweight, durable 100% corrosion, flame and vandal resistant polycarbonate construction
- Designed to be resilient, highly efficient and easy to install
- For ceiling, wall, suspension and pendant installations
- UV stabilized to reduce the yellowing index
- Liquid silicone memory retention gasket allows for installations in wet locations
- Incorporates a "dual concave" parabolic high-output, metallized reflector
- Also approved for through wiring application



Model No.	Mfg. No.	Volts	Price /Each
XC441	BS10048T8232AC120V	120	
XC442	BS10048T8232AC347V	347	