



GFCI Outlet Adaptors w/Surge Protection

- Small size (less than 2" W x 3" H) makes them ideal for the toolbox
- **XB069** includes booted test and reset buttons
- NEMA 5-15 P & R, 120 V/15 A
- Certified for sale in Canada by an accredited certification body

Model No. XB069 Yellow
Price/Each \$



User Attachable GFCI Plugs

- Replaces any standard NEMA 5-15 P plug on cords between 12-18 AWG (SJT)
- For use where the GFCI is needed as a permanent part of the tool or appliance
- Rainproof rated with booted test and reset buttons
- NEMA 5-15 P, 120 V/15 A
- Certified for sale in Canada by an accredited certification body

Model No. XA462
Price/Each \$



User Attachable Inline GFCI

- Easily wires onto cord between 12-18 AWG (SJT)
- Can be placed at any location on the cord set
- Rated for up to 20 amps to allow for use on equipment that operates on either a 15 A or 20 A circuit
- For use where the GFCI is needed as a permanent part of the tool or appliance
- Rainproof rated with booted test and reset buttons
- 120 V/20 A
- Certified for sale in Canada by an accredited certification body

Model No. XB070
Price/Each \$



AC Voltage Detectors

- Detects for the presence of AC voltage without contact
- Signals the presence of voltage with an LED light and audible buzzer
- Built-in flashlight
- Doubly-insulated housing for increased safety
- UL approved
- Cat. III 1000V, Cat. IV 600V safety ratings
- AC Voltage Range: 90 to 1000V
- Max. Working Current: 32mA
- Includes: 2 "AAA" alkaline batteries




REED

| Model No. | Mfg. No. | Description | Price /Each |
|-----------|----------|---------------------|-------------|
| IA976 | R5100 | AC Voltage Detector | |

FloorTraks®

- Ideal for cables that run over the floor where portable cords and cables cannot be concealed
- Flexible, non metallic cover
- Protects, organizes and reduces trip hazards
- Available in three different sizes
- Handles cables up to 1.25" (31.8 mm) in diameter

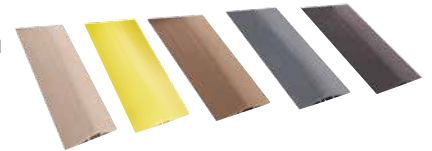

DIMENSIONS OF FLOORTRAKS®

| FloorTrak® | 2 | 3 | 4 |
|------------|---------------|---------------|---------------|
| Width | 2.75" | 3.00" | 3.25" |
| Height | 0.53" | 0.75" | 1.10" |
| Ctr. Hole | 0.60" x 0.31" | 0.75" x 0.50" | 1.21" x 0.75" |



| Model No. | | | | | Description | Length' | Price /Each |
|-----------|-------|-------|-------|--------|--------------|---------|-------------|
| Black | Brown | Beige | Grey | Yellow | | | |
| XA042 | XA038 | XA005 | XA001 | XA039 | FloorTrak® 2 | 10 | |
| XA009 | XA041 | XA040 | XA006 | XA245 | FloorTrak® 3 | 5 | |
| XA043 | - | - | - | XA046 | FloorTrak® 4 | 5 | |

Surge Protector

- Provides extra power for home electronics
- Clear Power® auto shut-off safeguard
- \$100,000 connected equipment warranty
- No. of Outlets: 6
- Cord Length: 4'
- Rated Joules: 1000 J
- Voltage: 12V

Model No. XC300
Mfg.No PB802225
Price/Each \$

PRIME®



1150 Joules Surge Protectors

- Provide extra power outlets for home electronics in the workshop, the kitchen, or the office
- Features high energy absorbing joule ratings and EMI/RFI filters
- Clear Power® auto shutoff safety device shuts power off after absorbing a major spike
- Lighted On/Off circuit breaker switch
- 6 outlet black metal housing prevents damage to the casing
- 14/3 SJT snug plug low profile power cord
- 15 A, 1875 W
- \$200 000 connected equipment warranty
- Length: 15'

Model No. XC042
Mfg.No PB802135
Price/Each \$

PRIME®

