



## Cushion Grip Hacksaw Frames

- Unique cushioned rubber grip reduces slippage for better control and comfort
- Rugged, sturdy frame built for professional tool users
- High tension technology for tightening the blade to 30,000 PSI
- Blade can be positioned for 45° or 90° cutting
- Patented quick change blade design

Model No. TJ246  
Mfg. No. 80965  
Price/Each \$




**CRESCENT NICHOLSON**

## High Tension Hacksaw Frames

- Quick changing blades
- Adjustable crank handle for tension up to 30,000 PSI torque and micro-adjustment
- Spare blades can be stored inside frame
- Blade can be positioned for 45° or 90° cutting
- End of frame can be used as a jab saw

Model No. TJ557  
Mfg. No. 80956  
Price/Each \$

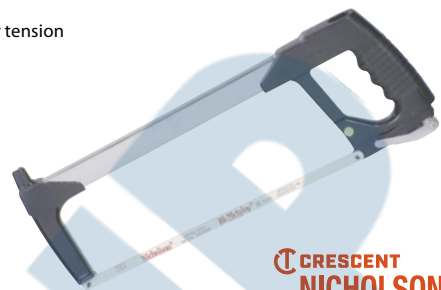

**CRESCENT NICHOLSON**

## Heavy-Duty Hacksaw Frames

- High impact, contoured handle
- Adjust to 10" or 12"
- 45° blade adjustment

Model No. TBH296  
Mfg. No. 80952  
Price/Each \$



**CRESCENT NICHOLSON**

## Economy Hacksaw Frames

- Adjustable from 10"/250 mm to 12"/300 mm
- Cuts to 2.75"/70 mm in depth
- For DIY and home use

Model No. TJ251  
Mfg. No. 80950  
Price/Each \$



**CRESCENT NICHOLSON**

## General Purpose Hacksaw Frames

- Instantly adjustable for 10"/250 mm to 12"/300 mm blades
- Adjusts 90° for vertical or horizontal cuts

Model No. VU145  
Mfg. No. 80951  
Price/Each \$



**CRESCENT NICHOLSON**

## Hacksaws

- Blade Length: 12"
- Handle Type: Plain
- Overall Dimensions: 17-5/16" L x 5-1/8" H
- Depth of Bow: 4" H
- Tensile Strength: 8000 PSI
- Strong aluminum die-cast handle provides comfort and control
- Guarded grip design protects knuckles from grazing


Model No. TYW991  
Price/Each \$



**aurora tools**

## High Tension Hacksaw Frames

- Professional quality high tension frame provides easy to use an efficient adjustment lever
- Rubber handle and thumb hold provides an ergonomic grip (EAM042)
- 4 angled mounting pins allow for both straight and angle cutting, also keeps the blade in place when tension is relieved
- Blade tension is approximately 28000 PSI (2000 kg/cm<sup>2</sup>)
- To tension blade, make 3 turn (360°) after first meeting resistance with blade
- Model EAM042 comes with a Starrett Bluestripe bi-metal unique® ground tooth hacksaw blade, model TBD490 comes with a Starrett Greenstripe® bi-metal unique® milled tooth hacksaw blade

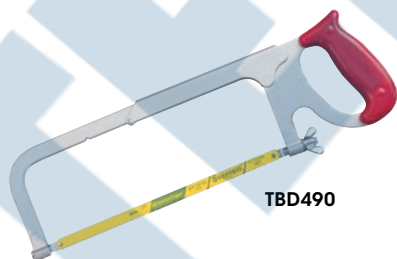

TBD490



EAM042

**Starrett®**

## Little-Nic® Utility Hacksaws

- Ergonomic cushioned handle
- Gets into small places
- Overall length 10"/250 mm,
- Uses any standard size hacksaw blade

Model No. TBH298  
Mfg. No. 80968  
Price/Each \$



**CRESCENT NICHOLSON**

## Jab Saws

- Special saw always needed for the difficult jobs: those narrow, hard-to-read areas
- Jab saw will work with any standard size hacksaw blade
- Can replace worn blade easily

Model No. TJ252  
Mfg. No. 80969  
Price/Each \$



**CRESCENT NICHOLSON**

Model No.	Mfg. No.	Description	Throat Depth	Price /Each
EAM042	67818	12" closed grip heavy-duty high tension hacksaw frame	4 3/8" (110mm)	
TBD490	60134	Heavy-duty adjustable closed grip hacksaw frame	3 3/4" (95mm)	