



Polypropylene Interceptor

- **Includes:** Fixed baffle retaining solids, Inlet outlet water seal, 12" (305 mm) diameter cleanout
- Made in Canada
- Length: 16"
- Width: 16"
- Height: 16"
- Type: Solids
- Wall Thickness: 1/2" (13 mm)
- Inlet & Outlet: 2"
- Bottom to Centre: 12" (305 mm)
- Centre to Top: 4" (102 mm)

Model No. PUM319

Mfg. No. CA-IS1616

Price/Each \$



CAN-AQUA
INTERNATIONAL

Polyethylene Neutralization Tank

- The 1/2" (13 mm) thick polyethylene cover is bolted and equipped with a neoprene gasket
- An initial limestone load of 1 to 3" 25 to 76 mm), containing over 90% (CaCO₃) calcium carbonate, fills the tank to the outlet apron
- Made in Canada
- Height: 42"
- Width: 30"
- Flow Rate: 1.9 LPM, 30 GPH
- Limestone Load: 900" (405 mm)
- Wall Thickness: 1/4" (6.3 mm)
- Inlet & Outlet: DN 4"
- Vent: DN 3"
- Standard(s) Met: ETL

Model No. PUM322

Mfg. No. CA-RN30

Price/Each \$



CAN-AQUA
INTERNATIONAL


Recessed Polypropylene Interceptor

- **Includes:** Removable baffle, Flow regulator, Integral trap with cleanout plug, Fixed baffle retaining solids, Bolted slip-resistant aluminum cover with neoprene gasket
- Suction connection
- Made in Canada
- Length: 28"
- Width: 25"
- Height: 21"
- Flow Rate: 132 LPM, 35 GPM
- Type: Grease
- Grease Capacity: 70 lbs. (31.7 kg)
- Wall Thickness: 1/2" (13 mm)
- Inlet & Outlet: DN 4"
- Bottom to Centre: 15" (381 mm)
- Centre to Top: 6" (152 mm)
- Standard(s) Met: WH-ETL

Model No. PUM318

Mfg. No. CASG35-E-RS

Price/Each \$

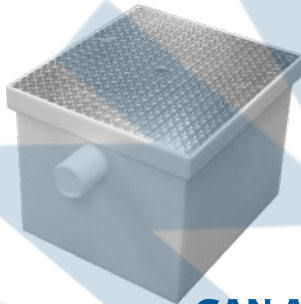

CAN-AQUA
INTERNATIONAL

Recessed Polypropylene Interceptor

- **Includes:** Fixed baffle retaining solids, Inverted "T" with cleanout, Slip-resistant bolted aluminum cover with sealing liner
- Made in Canada
- Length: 28"
- Width: 25"
- Height: 29"
- Flow Rate: 189 LPM, 50 gpm
- Type: Solids
- Wall Thickness: 1/2" (13 mm)
- Inlet & Outlet: DN 4"
- Bottom to Centre: 17" (432 mm)
- Centre to Top: 12" (305 mm)

Model No. PUM320

Mfg. No. CA-IS50


Price/Each \$




CAN-AQUA
INTERNATIONAL

Hand Wash Stations

- Type 304 stainless steel, 14 gauge, finish #4
- **Includes:**
 - (1) Wall bracket,
 - (1) Electronic faucet with mixing valve and transformer,
 - (1) 1-1/2" drain,
 - (1) Stainless shroud
- Made in Canada
- Type: Wall-Mounted
- Material: Stainless Steel
- Standard(s) Met: ETL, ASME A112.19.3, CSA B45.4-08 (R2013)

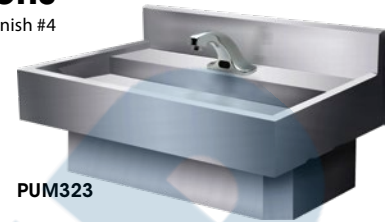

PUM323

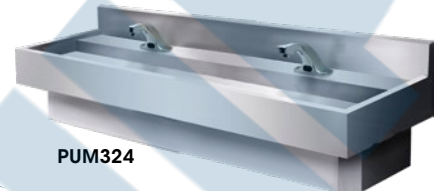

PUM324

CAN-AQUA
INTERNATIONAL

Model No.	Mfg. No.	No. of Faucets	Overall Width"	Overall Depth"	Overall Height"	Price /Each
PUM323	LMAI241121/Z6915-M-CWB	1	24	21	21-1/2	
PUM324	LMAI481121/Z6915-M-CWB	2	48	21	21-1/2	

Polypropylene Interceptor for Above Ground Installation

- **Includes:** Removable baffle, Flow regulator to facilitate cleaning, Integral trap with cleanout plug, Fixed baffle retaining solids, Cover with stainless bolt, Sealing liner, Rapid access cleanout
- 6" minimum clearance required between the top of the interceptor and the bottom of the counter
- Suction connection
- Made in Canada
- Length: 28"
- Width: 25"
- Height: 23"
- Flow Rate: 189 LPM, 50 gpm
- Type: Grease
- Grease Capacity: 100 lbs. (43.5 kg)
- Wall Thickness: 1/2" (13 mm)
- Access Cleanout: 1 @ 16" (406 mm)
- Inlet & Outlet: DN 4"
- Bottom to Centre: 17" (432 mm)
- Centre to Top: 6" (152 mm)
- Standard(s) Met: ETL

Model No. PUM317

Mfg. No. CASG50-S-RS

Price/Each \$



CAN-AQUA
INTERNATIONAL

Polypropylene Interceptor with Integrated Waste Recovery Tank

- **Includes:** Flow regulator, Removable baffle, Fixed baffle retaining solids, Water seal with a cleanout, Slip-resistant aluminum cover
- Made in Canada
- Length: 28"
- Width: 40"
- Height: 29"
- Flow Rate: 189 LPM, 50 gpm
- Type: Oil
- Inlet & Outlet: DN 4"
- Bottom to Centre: 17" (432 mm)
- Centre to Top: 12" (305 mm)
- Waste Oil Recovery Tank Capacity: 30 gal. (113 L)
- Standard(s) Met: ETL

Model No. PUM321

Mfg. No. CASH50-30

Price/Each \$



CAN-AQUA
INTERNATIONAL