

PORTABLE STRUCTURES & ENCLOSURES

- Curtain partitions screen, isolate, enclose and protect any area of any size
- Commonly used in welding and paint shops, but can be used anywhere
- Brackets made of 16-gauge steel and designed for wall or ceiling mount but can be self supported by floor stands
- Large selection of drape material can be utilized with any curtain

DESIGN YOUR OWN CURTAIN

Curtains - Take exact length of area of enclosure and add 10% fullness for proper draping. Then multiply length and height to obtain square footage. Curtains hemmed on top and two sides 2" pocket on bottom side. Brass grommet spacing must be specified when placing an order. Refer to model number for square footage cost of fabric required.

Track - Straight and curved. Straight track available in 5' and 10' lengths. Curved corners are 3' long with 2' radius welded splicer on each end included. When using a curved track, length is increased by 2', e.g. 8' straight track with a curve at each end overall = 12'.


Carriers - Since curtains are made to any length be sure to add one additional carrier to actual length of curtain ordered. For example every 10' of curtain is fabricated with 11 grommets on top side. Therefore 11 carriers are required. A double carrier should be used at the beginning of each curtain. Steel roller carriers are permanently lubricated enclosed bearings.


Clamps - Available for flush ceiling/beam mounting and floor mounting. Clamps can also be used as track splicers. All fasten with supplied Allen bolts. Order sufficient clamps to support track every 5'.

Standards - When free standing uprights are required, be sure to specify clamps for fastening track on posts **KB032** (Posts are required every 8'). Other custom heights on application.

Note: All posts should be lagged or welded to floor as required.

TRACKS

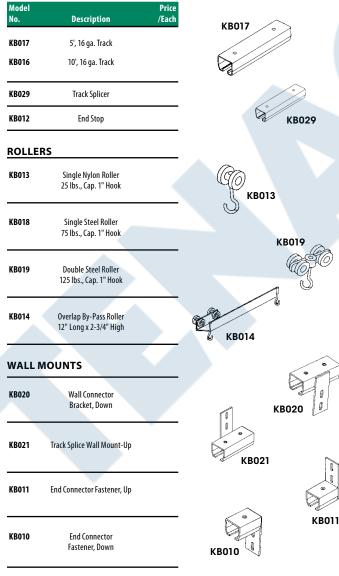




CURTAINS

Model No.	Description	Price /Each
KB040	10 oz./sq.yd., Before Treatment Cotton Duck, Flame Resistant Army Green	/sq.ft.
KB004	14 mil Yellow PVC, Flame Resistant	/sq.ft.
KB003	14 mil Green PVC, Flame Resistant	/sq.ft.
KB038	20 mil Clear PVC, Flame Resistant	/sq.ft.

Note: Other colours are available.

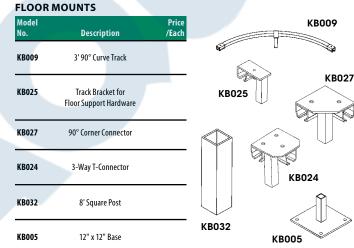

BEAM MOUNTS/SUSPENSION

- KB008 3' 90° Curve Track
 KB031 Ceiling Clamp
- KB028 90° Corner Connector
- KB023 3-Way T-Connector


CEILING MOUNTS


KB007 3' 90° Curve Track, 3 flush connectors

 KB030
 Track Splicer

 KB026
 90° Corner Connector

 KB022
 3-Way T-Connector





1858

1-800-661-2400

www.tenaquip.com