




## Thermostatic Mixing Valves

- Blend hot and cold water to a comfortable flushing temperature
- Reliable liquid-filled thermostat with a 10-year manufacturer's warranty
- Check stops on inlets
- Adjustable set point within temperature range
- Accurate temperature control to within  $\pm 3^{\circ}\text{F}$
- Built-in cold water bypass, assuring cold flow
- Easy installation and serviceability
- Positive shut-off of hot supply when cold supply is lost
- Dirt and lime resistant
- Dial thermometer
- Factory assembled and tested
- Universal mounting capability
- Rough bronze finish
- SEI certified to ANSI standard Z358.1
- Temperature adjustment are vandal resistant



SAI289

Integral strainer checkstops on inlet

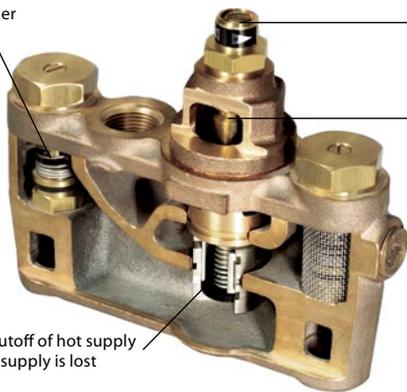

Set point adjustable within range by hex key set screw

Reliable, liquid-filled thermostat

Positive shutoff of hot supply when cold supply is lost



## Thermostatic Mixing Valves

- Designed to mix hot and cold water
- Flows from 10 - 78 GPM
- Modular brass design with internal check stops
- Wax-based thermostat technology for fast response time
- Oversized valve seals resist failures caused by foreign matter
- Proven highly reliable temperature control
- Features the lowest pressure drop in the industry
- Smallest TMV's in the industry, taking up less room under cabinetry
- Designed to work with hard and soft water quality
- Features cold water bypass and hot water shut off (in the event of cold water failure)
- CSA certified to ASSE 1071 and ANSI Z358.1



SEC205

SEI814



Model No.	Mfg. No.	Description	Accommodates	Price /Each
SAI289	S19-2000	7 GPM @ 30 PSI	Three eyewashes or one eye/face wash	
SAI294	S19-2100	19.5 GPM @ 30 PSI	One combination shower with eyewash or multiple eyewashes	
SAI299	S19-2200	54 GPM @ 30 PSI	Two combination showers with eyewashes or multiple eyewashes	

Model No.	Mfg. No.	Description	Ideal for	Price /Each
SEI814	9201EW	10 GPM @ 30PSI	Eyewash or Eye/Face Wash	
SEB268*	TWBSEWE	12 GPM @ 30 PSI	Eyewash or Eye/Face Wash	
SEC205	9201E	31 GPM @ 30 PSI	Single Shower Unit	
SEC206	9202E	78 GPM @ 30 PSI	Multiple Shower Units	

\*Lead-free with full-flow bypass

## On-Site® Gravity-Fed Eyewash Stations

- Ideal for locations where a plumbed water source is not available
- High-visibility yellow, moulded pedestal and tank
- Hinged eyewash tray activates in one quick motion
- Stainless steel clamps secure the tank during transport
- Vandal-resistant unit: foreign objects cannot be introduced into tank because all openings are sealed once the tank is installed
- One of the lightest portable eyewashes on the market
- SEI certified to ANSI standard Z358.1
- Includes wall bracket (can also deck mount)

### ON-SITE® HEATER JACKETS

- Protects against freezing: down to  $-23.3^{\circ}\text{C}$  ( $-10^{\circ}\text{F}$ )
- Insulated heater jacket conceals a 121 W heater
- Secondary thermostat prevents overheating if primary thermostat fails
- Requires 120-volt AC line
- All UL-listed components

### ON-SITE® WASTE CARTS

- High-visibility yellow
- Captures used fluid, 56-gallon capacity
- Tapered sump, easy to drain



Model No.	Mfg. No.	Description	Wt. lbs.	Price /Each
SAK609	S19-921	Gravity-Fed Eyewash	23	
SAK610	S19-921H	Gravity-Fed Eyewash w/Heater Jacket	25	
SAK611	S19-399	Waste Cart	28	
SAK613	S19-865	Water Preservative, 8-oz. Bottle	0.5	



SAK610

SAK609

SAK611